

## CEILING LOUDSPEAKERS

# MC Metal Ceiling Loudspeakers

MC – metal ceiling loudspeakers with built-in 100V transformer. Ultra slim design of the speakers makes them ideal for installation in low space or minimum clearance situations.




# MC 4TA & MC 5T

Quick fit clamps allow easy and quick mounting into false ceilings. MC loudspeakers have powerful middle frequency sound reproduction and high sound pressure level (SPL). The MC series is perfect for speech announcements in emergency systems where public address is the main requirement.

## MC 4TA






HORIZONTAL / VERTICAL POLAR DIAGRAMS

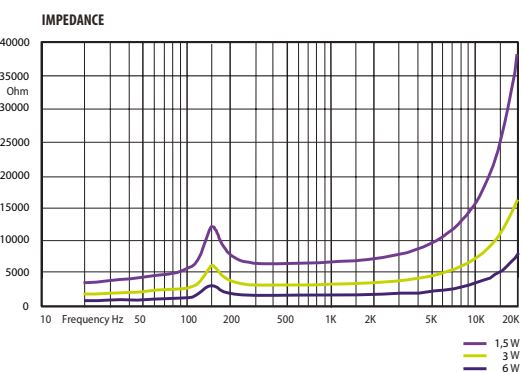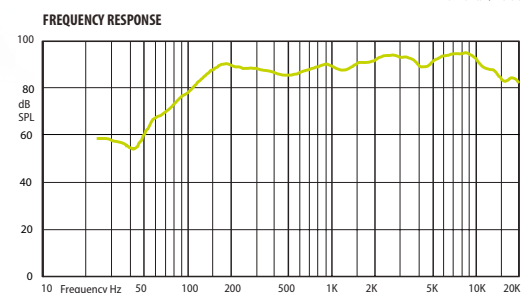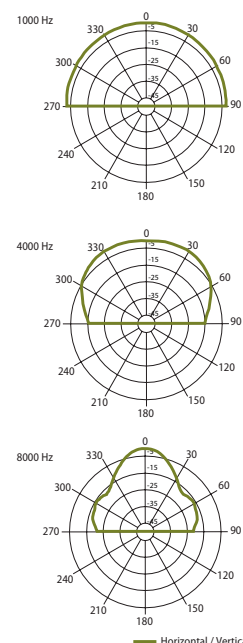

| Technical Specifications | MC 4TA                       |
|--------------------------|------------------------------|
| Rated power              | 6 W                          |
| Transformer power taps   | 6 W - 3 W - 1,5W             |
| Sensitivity              | 91 dB (1 W/1 m)              |
| Maximum SPL              | 104 dB (Pmax/1 m) at 6878 Hz |
| Driver impedance         | 8 Ω                          |
| Frequency response       | 110 Hz – 17 kHz              |
| Dispersion at 1000 Hz    | 180° conical                 |
| Driver dimensions        | 4" (100 mm) full range       |
| Dimensions               | ø 180 mm × 50 mm             |
| Weight                   | 0,7 kg                       |
| Material                 | Steel                        |
| Colour                   | White (RAL 9016)             |

## MC 5T

HORIZONTAL / VERTICAL POLAR DIAGRAMS

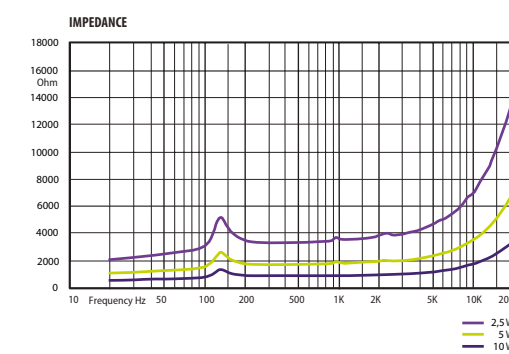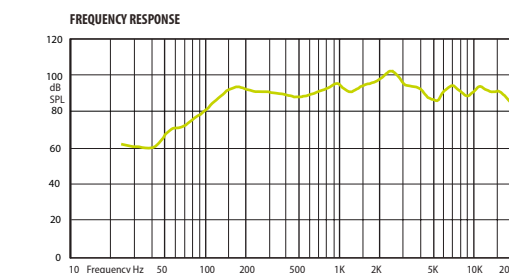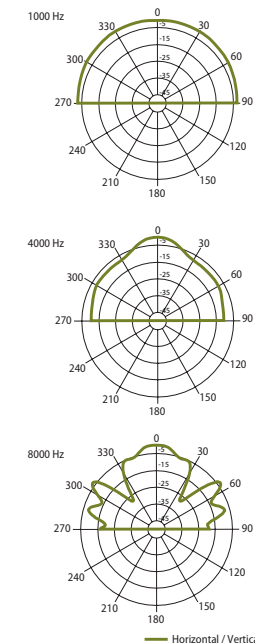

| Technical Specifications | MC 5T                        |
|--------------------------|------------------------------|
| Rated power              | 10 W                         |
| Transformer power taps   | 10 W - 5W - 2,5W             |
| Sensitivity              | 94dB (1 W/1 m)               |
| Maximum SPL              | 113 dB (Pmax/1 m) at 2371 Hz |
| Driver impedance         | 8 Ω                          |
| Frequency response       | 100 Hz – 17 kHz              |
| Dispersion at 1000 Hz    | 180° conical                 |
| Driver dimensions        | 5" (130 mm) full range       |
| Dimensions               | ø 200 mm × 54 mm             |
| Weight                   | 0,75 kg                      |
| Material                 | Steel                        |
| Colour                   | White (RAL 9016)             |