


TECHNICAL SPECIFICATIONS

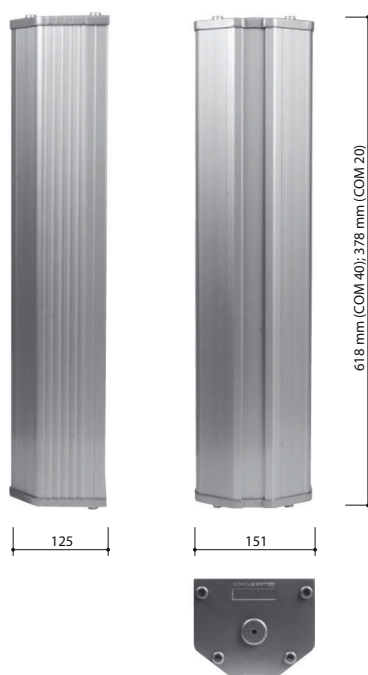

COM

COM - weatherproof column loudspeakers for outdoor and indoor use.

Wide frequency response and high sensitivity makes it suitable for speech and background music reproduction in large areas. Typical application areas of COM loudspeakers are railway stations, subways, churches, factory buildings, warehouses and outdoor parking lots. Mainly designed for outdoor areas.



Above: included mounting hardware

unit: mm

	COM 20	COM 40
Rated power	20 W	40 W
Transformer power taps	20 W - 10 W	40 W - 20 W
Sensitivity	92 dB (1 W/1 m)	94 dB (1 W/1 m)
Maximum SPL	105 dB (Pmax/1 m) at 1179 Hz	110 dB (Pmax/1 m) at 1113 Hz
Frequency response	100 Hz – 15 kHz	100 Hz – 15 kHz
Dispersion at 1000 Hz	180° (H), 150° (V)	180° (H), 150° (V)
Protection	IP 54	IP 54
Dimensions	378 mm × 151 mm x 125 mm	618 mm × 151 mm x 125 mm
Driver dimensions	2 x 5" (127 mm)	4 x 5" (127 mm)
Weight	2,9 kg	4,7 kg
Material	Aluminum	Aluminum
Colour	Grey (RAL 7038)	Grey (RAL 7038)